




Fender Frontman 15r Power Input Jack Replacement

Written By: Will

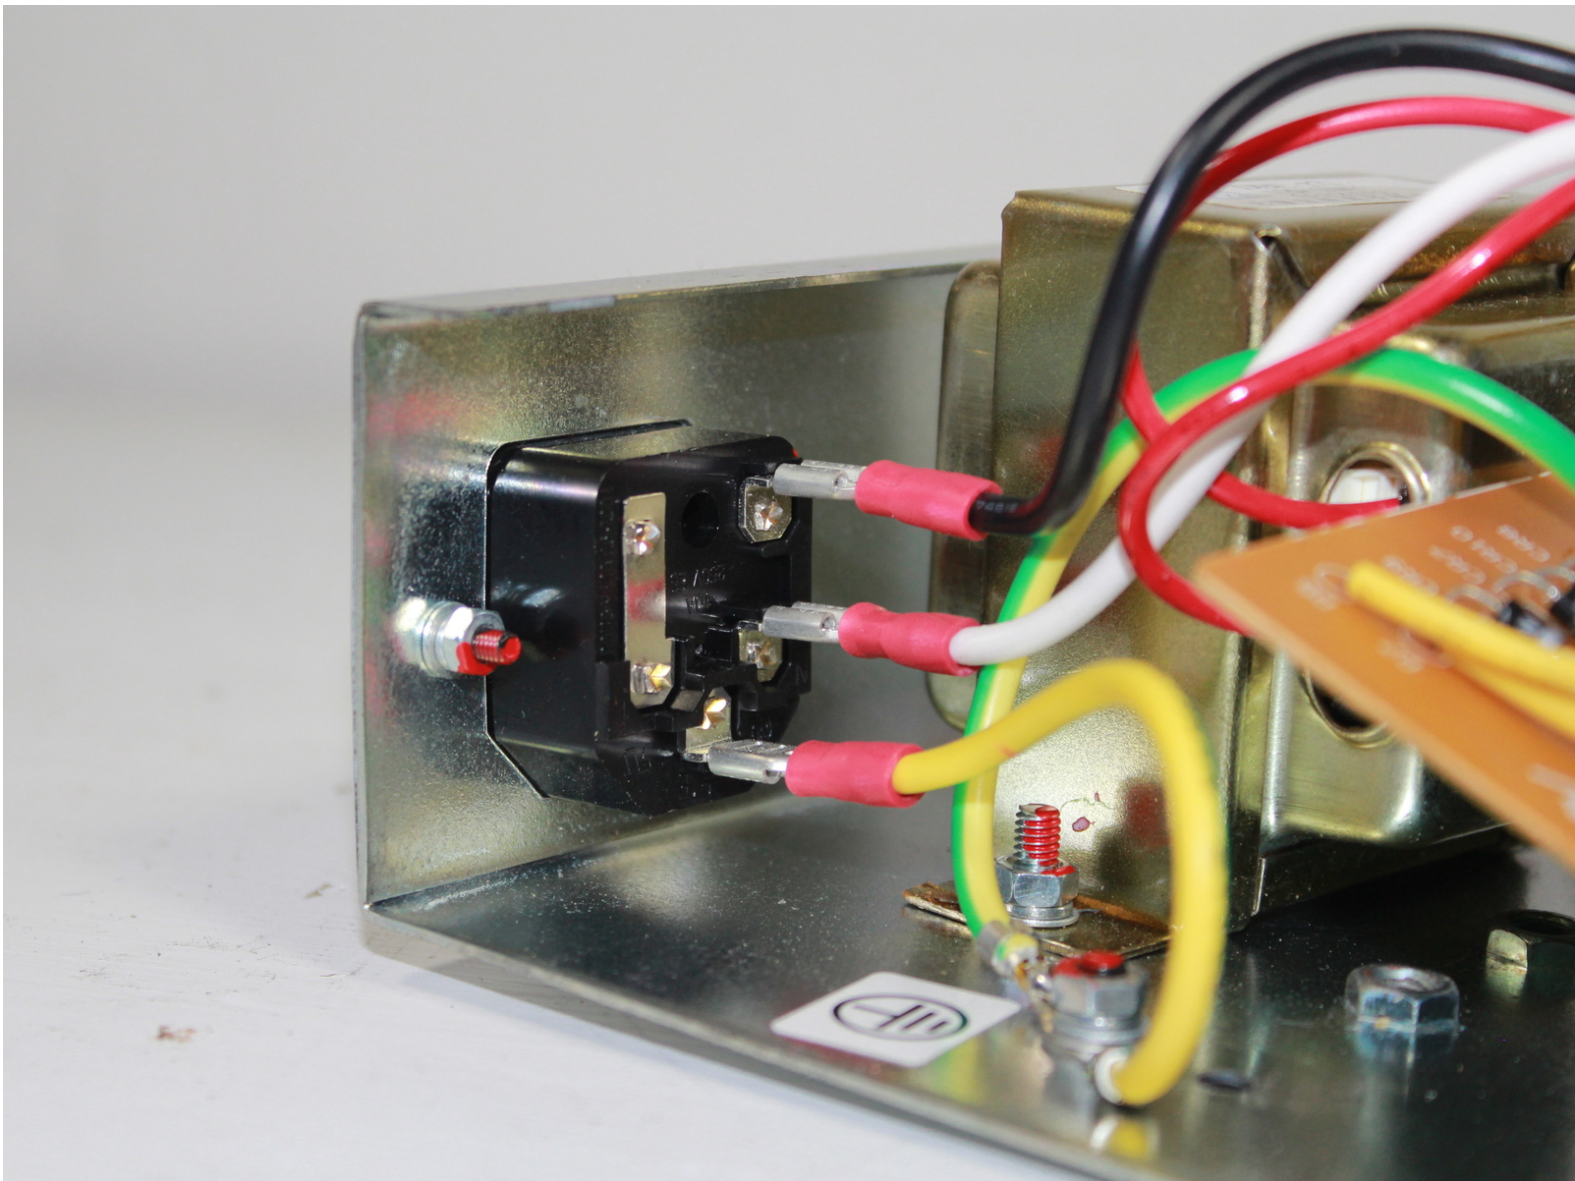

INTRODUCTION

If your device does not have power, replace the power input jack.



TOOLS:

- [pair Needle Nose Pliers](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Back panel



⚠ Be sure to unplug the device before proceeding.

- Use a Phillips #0 screwdriver to remove the four 21.7mm screws holding the back panel to the frame.

Step 2




- Once the screws are out, use a plastic opening tool or spudger to pry the top of the back panel open. There may be some resistance, but it will eventually pry loose.

Step 3




- Once the top is separated, use your hand to remove the back panel from the unit.

Step 4 — Mounting Bracket

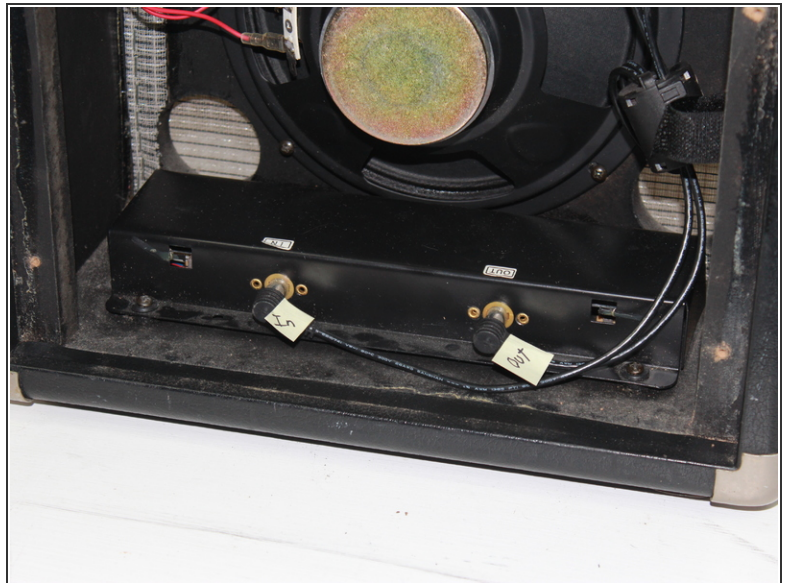

- There will be two black wires connecting the top mounting bracket to the reverb box at the bottom of the unit. Label the wires to prevent crossing upon re-installation, then unplug the wires from the reverb box.

Step 5

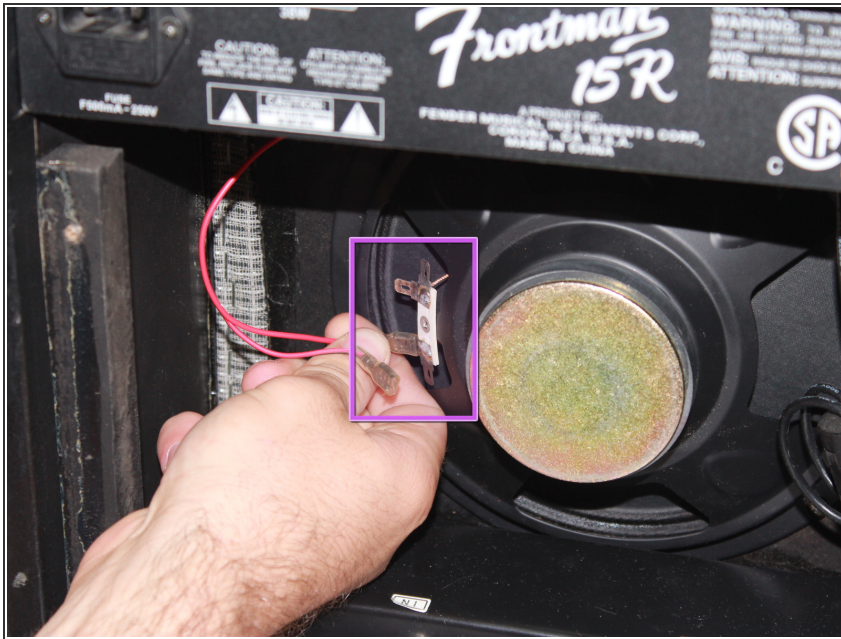

- Label and unplug the two red wires connecting the mounting bracket to the speaker by pulling them off the nodes.

Step 6




- Use a Phillips #1 screwdriver to unscrew the four 36.4 mm screws holding the mounting bracket to the top of the amp.

Step 7





- Pull the mounting bracket free from the frame. It may be wedged in very snug, in which case, use a plastic opening tool/spudger to pry it loose from the front.

Step 8 — Power Input Jack

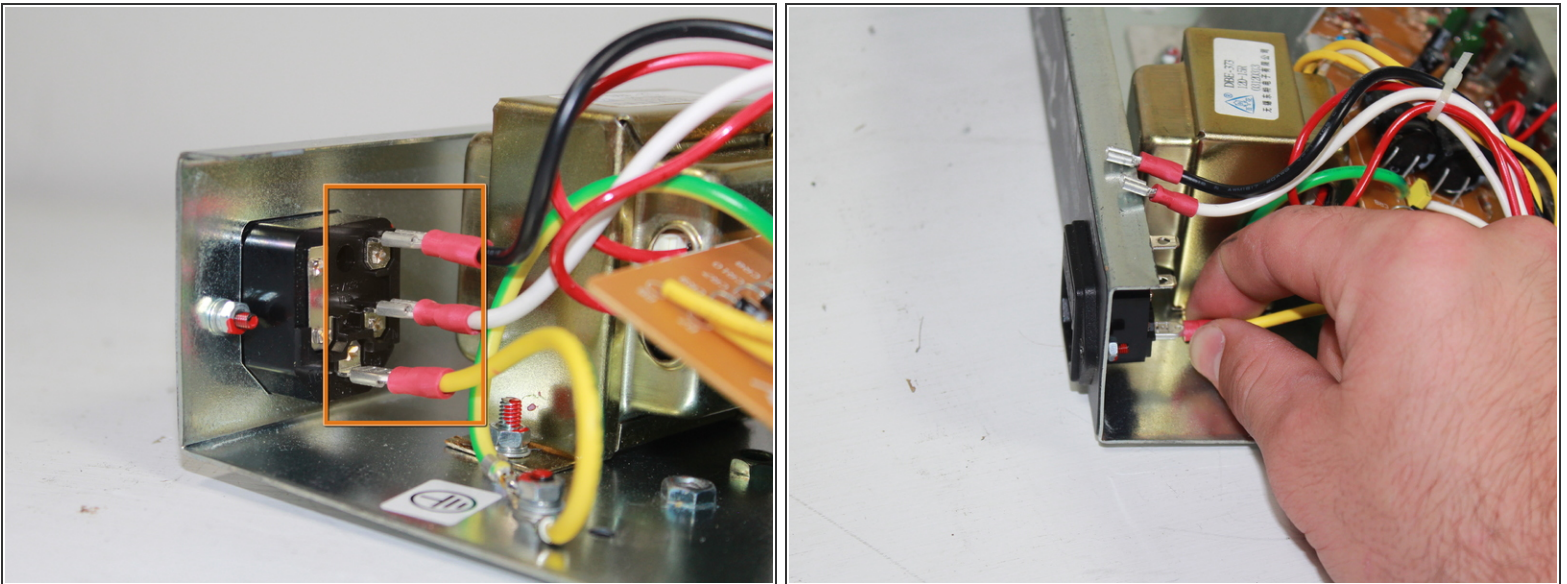

- Before disconnecting the wires, label, make note of, or memorize each wire according to where it connects to the power input jack.
- Disconnect the wire connectors from the back of the input jack by pulling them away from the jack.

Step 9

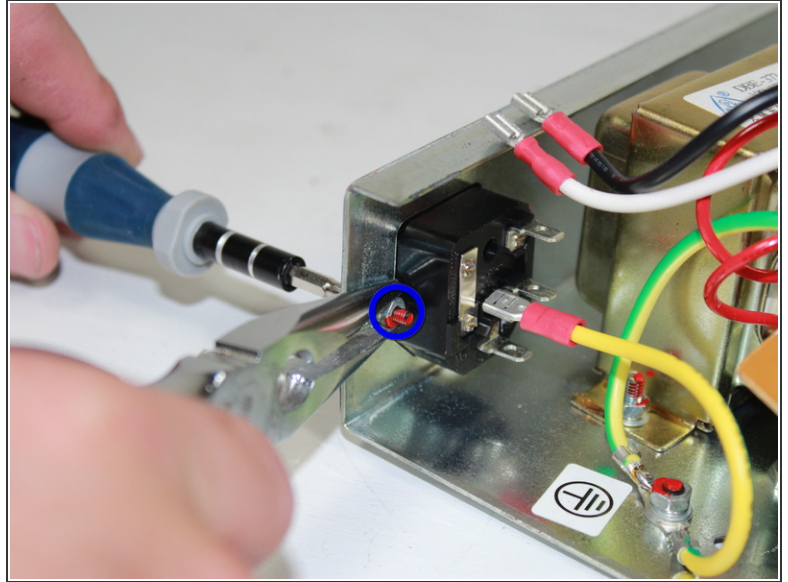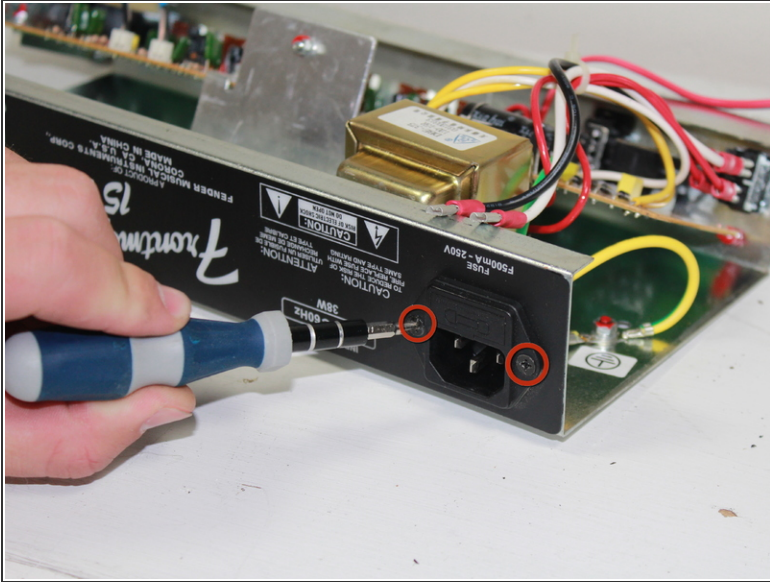

- Use Philips #1 Screwdriver to unscrew the two 12.1 mm screws on the exterior of the power input jack.
- Hold the nut in place while unscrewing the 12.1 mm screws using a pair of needle nose pliers to prevent it from spinning.

Step 10



- Pull the power input jack out of the mounting bracket.

Once the old power jack is removed, to install the replacement power jack, follow the guide in reverse.

This document was last generated on 2017-06-18 12:07:08 AM.